

# SERENDIPITY

## ENGINEERED WOOD FLOORING ADHESIVE

### DESCRIPTION

Healthy Home Serendipity Engineered Wood Flooring Adhesive offers a variety of solutions for your wood floor installation needs. Healthy Home Serendipity is an acrylic polymer adhesive designed for use with engineered and parquet wood flooring and can be used to install most underlayments designed to be used under wood flooring. This adhesive can be used to install cork underlayment, but cannot be used to install cork finished flooring. With its easy to trowel application and exceptional green grab, it changes the way wood flooring is installed. Its green grab helps reduce any board slippage during installation. Healthy Home Serendipity holds its trowel ridge better than any other product on the market, this minimizes hollow spots and reduces call backs.

### Coverage

Flooring	Trowel Recommendation	Approximate Spread Rate
<b>Finger Block Parquet</b>	1/8" x 1/8" x 1/8" Square Notch	70-80 ft <sup>2</sup> / Gallon*
<b>Wood Flooring</b> < 1/2" thick and < 5" wide	1/4" x 1/8" x 1/4" Square Notch	40-50 ft <sup>2</sup> / Gallon*
<b>Wood Flooring</b> > 1/2" thick or 5" wide	3/16" x 3/16" x 3/16" Square Notch	35-45 ft <sup>2</sup> / Gallon*
<b>Cork or most acoustical underlayment</b>	1/16" x 1/16" x 1/16" Square Notch	100-125 ft <sup>2</sup> / Gallon*

\*Spread rate will vary based on substrate texture and absorption rate, trowel angle and other factors. Use this chart as a reference only.

### Approved Substrates

- › Concrete
- › Portland based underlayment
- › Properly prepared gypcrete / lightweight concrete
- › APA rated plywood
- › Terrazzo
- › Radiant heated floors
- › Single layer of approved, fully adhered resilient flooring

### Substrate Preparation

All substrates should be prepared in accordance with flooring manufacturers guidelines, NWFA Installation Guidelines and/or ASTM F710. Typical guidelines require the substrate to be flat within 3/16" in 10' feet. Moisture tests are required on all concrete subfloors regardless of age or elevation. Moisture testing must be performed in accordance with the most current ASTM F1869 Standard Test Method for Measuring Moisture Vapor Emission Rate of Concrete Subfloor Using Anhydrous Calcium Chloride and ASTM F2170 Standard Test Method for Determining Relative Humidity in Concrete Floor Slabs Using in situ Probes. This adhesive will ALWAYS tolerate more moisture than the wood flooring. ALWAYS refer to the wood flooring guidelines for moisture guidelines. ***This adhesive provides no moisture protection and will not reduce MVER.***


### Storage

Protect adhesive from freezing. Store material in temperature-controlled buildings.

### Shelf Life

Unopened packaging stored in proper conditions have a shelf life of 1 year.



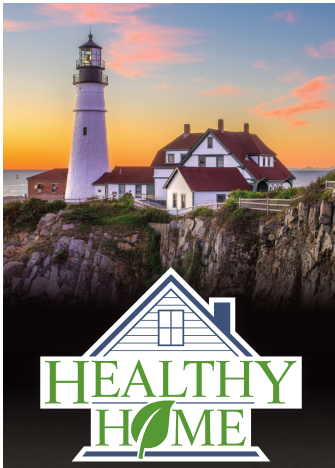

## TECHNICAL DATA

Base Polymer	Proprietary Polymer Blend
Color	Beige
Shelf Life	1 year in unopened container
Appl. Temp. Range	65°-95° F
VOC Content	< 1 grams / liter
After Installation	Foot traffic allowed after 8 hours, heavy traffic or furniture 24 hours
Working Time	Typically up to 30 minutes depending on ambient conditions

\*Ambient temperature and humidity will greatly affect the dry time of the adhesive. \*\*Keep the adhesive clean and free from debris during installation.

## INSTALLATION INSTRUCTIONS

Moisture testing is required on all concrete subfloors, regardless of grade level or if the concrete is freshly poured or is classified as an older slab. All moisture testing should be performed using the most up to date ASTM F1869 Anhydrous Calcium Chloride and ASTM F2170. **Refer to wood flooring manufacturer for moisture guidelines.**

Spread adhesive, with the recommended notched trowel, leaving ridges of enough height to establish complete transfer to back of the wood floor covering. Trowel sizes may need to be adjusted due to subfloor porosity, floor covering backing and open time requirements. Only spread enough adhesive than can be covered in 30 minutes. Healthy Home Serendipity Engineered Wood Flooring Adhesive is a wet-set adhesive, wood flooring must be placed into the adhesive while it is still wet. Adhesive transfer to the back is required. If the adhesive has "skinned" over, the adhesive must be scraped up and re applied. Lift boards periodically during the installation to ensure you are achieving 100% coverage. Each manufacturer will have their own specific guidelines for installation that must be followed. Once the flooring has been installed, it must be rolled using a 100 lb. 3-section roller, in both directions. Hollow spots in wood flooring can only be caused by not properly flattening the substrate prior to installation. The rigid wood flooring will bridge across the low area on the substrate and not allow the adhesive to make proper transfer and bond, this ultimately causes the hollow sound after installation.

For Technical Support contact your Healthy Home Adhesives Sales Manager or call 877-458-3833.

## RESTRICTIONS

1. Refer to flooring manufacturer for recommendation.
2. Do not use with any vinyl or pvc flooring.
3. For interior installations only.
4. It is the sole responsibility of the installer to determine the suitability and compatibility of the adhesive for the intended application.

## CLEAN UP

Fresh adhesive can be cleaned with warm, soapy water and a clean rag, dried adhesive will require the use of mineral spirits or other clear solvent.

## WARRANTY

Healthy Home Adhesives offers a limited liability warranty for this material when used in accordance with the label and TDS.

## WARNING

This product can expose you to chemicals including chlorothalonil, which is known to the State of California to cause cancer. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).